




InLine 76660S interface cards/adapters Internal M.2

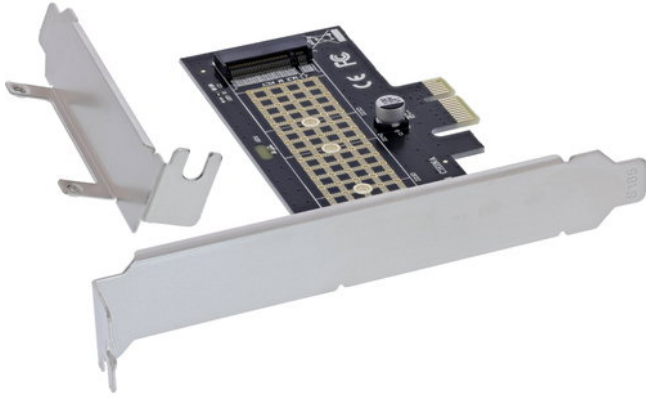

Model: 76660S

Manufacturer: INLINE

EAN: 4043718341559

Product Code: 1081909

R958

Supports an NVMe SSD (M.2 Key M) for compact high-performance storage solutions

PCIe 3.0 x1 interface with up to 1 Gb/s effective bandwidth

Automatic lane detection on boot for easy system integration

LED indicator for displaying read and write activities

No additional driver required - native support by Windows and Linux

The **InLine® PCI Express card** expands your system with an **internal NVMe M.2 slot**, which enables the connection of an **M.2 SSD (Key M)**. Thanks to the **PCIe 3.0 x1 interface** with **up to 1 Gb/s transfer rate**, the card is ideal for systems that require additional fast storage space.

The automatic **lane detection during boot** ensures optimal integration into the system. The M.2 SSD is powered directly via the PCIe bus (3.3 V), and an **LED indicator** provides information about the current operating and activity status.

Technical data:

The product information provided is for reference purposes only. Technical specifications, photos, descriptions and prices may change without prior notice. The manufacturer and seller are not responsible for possible data discrepancies or typographical errors. We recommend checking the current information before purchasing.

itworkup.co.za | sales@itworkup.co.za | +27 (11)541-9950

Bus type & PCIe: PCIe 3.0 x1 (operational in x1, x4, x8 and x16 slots)

Connection – interfaces:

- 1 x M.2 slot (Key M) for NVMe SSDs
- Supported module sizes: 2230, 2242, 2260, 2280

Dimension: 95 mm x 52 mm (PCIe board)

Data rate: Maximum approx. 1 Gb/s

Operating conditions:

Operating temperature: -40 °C to +85 °C

Features:

Automatic detection of the lane configuration during booting

Onboard LED indicator (1x read/write activity LED)

The M.2 NVMe SSD draws its power supply directly from the PCIe bus (3.3 V)

No additional driver required

System requirements:

Hardware:

PC with one free PCIe slot (x1, x4, x8 or x16)

Motherboard that supports PCIe 3.0 or higher

Operating system support:

Windows: 11, 10, 8, 8.1

Windows Server: 2012 R2

Linux: Native support (Fedora, SUSE, Ubuntu, Red Hat)

Scope of delivery:

1 x InLine® PCI Express card to 1x internal NVMe M.2

1 x low-profile slot bracket

The product information provided is for reference purposes only. Technical specifications, photos, descriptions and prices may change without prior notice. The manufacturer and seller are not responsible for possible data discrepancies or typographical errors. We recommend checking the current information before purchasing.

itworkup.co.za | sales@itworkup.co.za | +27 (11)541-9950

1 x hand screwdriver

2 x screws

1 x heat conduction pad

1 x instruction manual (German/English)

Operating temperature: 0° C – 55° C

Storage temperature: -40° C – 70° C

Humidity: 10% - 90% non-condensing

The product information provided is for reference purposes only. Technical specifications, photos, descriptions and prices may change without prior notice. The manufacturer and seller are not responsible for possible data discrepancies or typographical errors. We recommend checking the current information before purchasing.

itworkup.co.za | sales@itworkup.co.za | +27 (11)541-9950