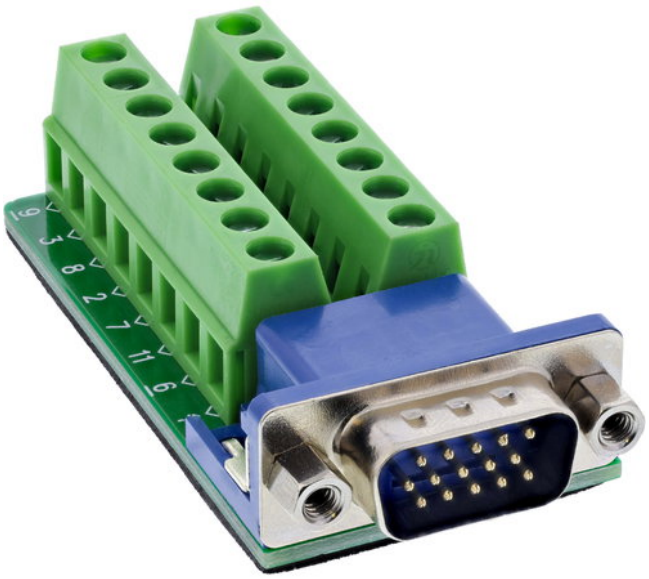


InLine 92503B wire connector Terminal block, VGA (HD15) Blue, Green

Model: 92503B

Manufacturer: INLINE

EAN: 4043718346035

Product Code: 1081948

R889

Time savings during installation: Quick wiring via screw terminals for 18–26 AWG – tool-assisted with flat-head screwdriver ≤ 2.5 mm.

Stable connection thanks to screw lock: The VGA connector (HD15) is equipped with a mounting thread (UNC #4-40) and enables secure mechanical fastening with matching sockets – vibration-proof and durable.

Versatile industrial applications: Ideal for analog video signals, control lines, or prototyping in test setups, machines, or visualization systems.

Compact design: With a width of only 63.8 mm, the terminal block can be integrated into existing systems in a space-saving manner – even where space is limited.

High signal quality: An insulation resistance of ≥ 10 MΩ at 300 V DC and a rated current of 0.7 A per pin ensure reliable signal transmission – even under continuous load and in industrial environments.

The product information provided is for reference purposes only. Technical specifications, photos, descriptions and prices may change without prior notice. The manufacturer and seller are not responsible for possible data discrepancies or typographical errors. We recommend checking the current information before purchasing.
itworkup.co.za | sales@itworkup.co.za | +27 (11)541-9950

The InLine® VGA (HD15) terminal block with connector in a 2-row design is ideal for wiring analog signals, e.g., for visualization, control, or service applications. Individual wires in the 18–26 AWG range can be securely connected using screw terminals with pressure plates – without any soldering. Wiring is tool-assisted with a flat-blade screwdriver ≤ 2.5 mm.
The integrated screw lock (UNC #4-40) ensures a reliable mechanical connection to the opposite end – even with frequent actuation or vibration. The compact design allows space-saving integration into housings, test environments, or control systems. An EVA insulating layer provides additional protection when mounting on conductive surfaces.

VGA interface:HD15, connector, 2-row
Connection technology: Screw terminal with pressure plate
Connection range:18–26 AWG
Actuation: With flat-blade screwdriver ≤ 2.5 mm
Rated current: 0.7 A per pin
Max. operating voltage: 100 V between two signals
Insulation resistance:≥ 10 MΩ @ 300 V DC
Operating temperature:–20 °C to +105 °C
Insulation layer:EVA insulation on underside
Dimensions:approx. 64 × 31 × 18 mm (L × W × H)

The product information provided is for reference purposes only. Technical specifications, photos, descriptions and prices may change without prior notice. The manufacturer and seller are not responsible for possible data discrepancies or typographical errors. We recommend checking the current information before purchasing.
itworkup.co.za | sales@itworkup.co.za | +27 (11)541-9950