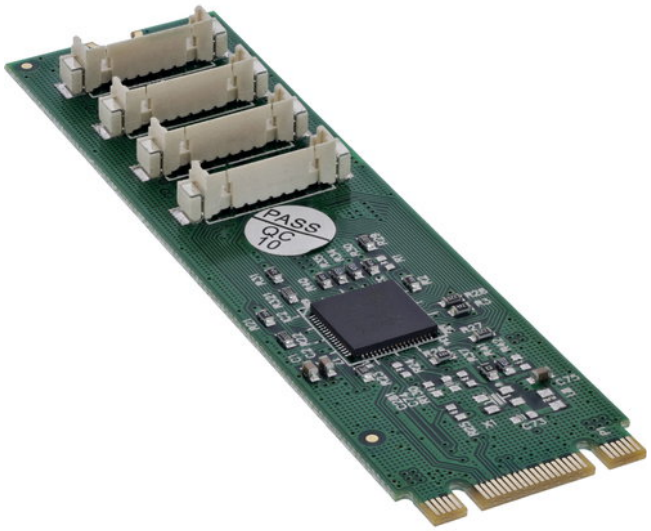

InLine 76660W interface cards/adapter Internal Serial

Model: 76660W

Manufacturer: INLINE

EAN: 4043718341610

Product Code: 1552732

R2,076

Expansion card for converting M.2 to 4x serial 9-pin connectors

PCIe 3.0 x4 interfacewith support for high data rates

Automatic lane detection at bootfor easy system integration

Onboard LED indicatorto display the operating activity

Compatible with Windows and Linux

The **InLine® interface card M.2 to 4x serial 9pin connector**enables the use of up to four serial interfaces (DB9-9pin) and offers a powerful conversion from M.2 to serial communication. The card is equipped with a **PCIe 3.0 x4 interface**and supports **data rates of up to 4 Gb/s**.
The automatic lane detection at boot ensures seamless system integration. The card is powered directly via the PCIe bus (3.3 V). The scope of delivery also includes **low-profile slot brackets**so that the card can also be used in more compact systems.

Technical data:

The product information provided is for reference purposes only. Technical specifications, photos, descriptions and prices may change without prior notice. The manufacturer and seller are not responsible for possible data discrepancies or typographical errors. We recommend checking the current information before purchasing.
itworkup.co.za | sales@itworkup.co.za | +27 (11)541-9950

Bus type & PCIe: PCIe 3.0 x4 (maximum bandwidth up to 4 Gb/s)

Controller/chipset: ASIX AX99100

Ports – interfaces:

1 x M.2 slot (Key M) for the module connection

4 x serial 9-pin connector (DB9-9pin)

Compatible module sizes: 2230, 2242, 2260, 2280

Dimensions: 22 mm x 80 mm (M.2 board)

Operating temperature: -40 °C to +85 °C

Functions:

Automatic lane detection during the boot process

LED indicator for displaying read/write activities

Power supply via PCIe bus (3.3 V)

No driver installation necessary

System requirements:Hardware:

Free PCIe x4 slot (also compatible with x8 or x16 slots)

Motherboard with PCIe 3.0 or higher

Operating system compatibility:

Windows: 11, 10, 8.1, 8, 7

Windows Server: 2012 R2

Linux: from kernel version 2.6

Scope of delivery:

1 x InLine® interface card M.2 to 4x serial 9pin connector

4 x low-profile slot brackets

2 x high-profile slot brackets

4 x DB9 9-pin serial cables (20 cm)

The product information provided is for reference purposes only. Technical specifications, photos, descriptions and prices may change without prior notice. The manufacturer and seller are not responsible for possible data discrepancies or typographical errors. We recommend checking the current information before purchasing.

itworkup.co.za | sales@itworkup.co.za | +27 (11)541-9950

10 x screw

1 x driver CD

1 x user manual (German/English)

Operating temperature: 0° C – 55° C

Storage temperature: -40° C – 70° C

Humidity: 10% - 90% non-condensing

The product information provided is for reference purposes only. Technical specifications, photos, descriptions and prices may change without prior notice. The manufacturer and seller are not responsible for possible data discrepancies or typographical errors. We recommend checking the current information before purchasing.

itworkup.co.za | sales@itworkup.co.za | +27 (11)541-9950