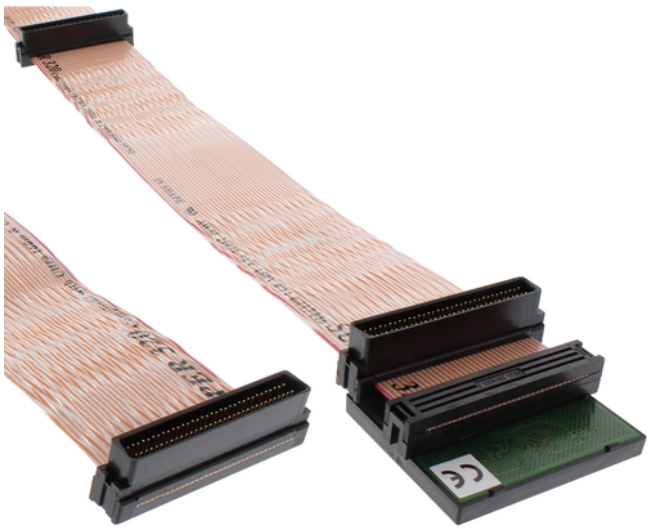


InLine SCSI U320 ribbon cable, 68pol, for 2 devices, with terminator

Model: 29953A

Manufacturer: INLINE

EAN: 4043718012237

Product Code: 462056

R1,409

Integrated LVD/SE termination for stable bus architecture: The integrated terminator reduces signal reflections and ensures standard-compliant termination within existing Ultra320 SCSI structures.

Reliable Ultra320 data transfer: Supports transfer rates of up to 320 Mb/s and enables stable communication between the controller and peripheral devices.

Optimised for internal system integration: The 68-pin twisted pair ribbon cable is suitable for structured cabling within PC enclosures and industrial systems.

Daughterboard connection of up to two devices: Three IDC 68-pin sockets allow up to two SCSI U320 peripheral devices to be connected to one controller.

Compatible with LVD and SE environments: Supports LVD/SE specifications and is suitable for existing Ultra320 SCSI infrastructures.

The product information provided is for reference purposes only. Technical specifications, photos, descriptions and prices may change without prior notice. The manufacturer and seller are not responsible for possible data discrepancies or typographical errors. We recommend checking the current information before purchasing.
itworkup.co.za | sales@itworkup.co.za | +27 (11)541-9950

The InLine® SCSI U320 ribbon cable was developed for internal use in Ultra320 SCSI systems. It enables the structured connection of up to two peripheral devices to a SCSI U320 controller within a PC case or industrial system.
The 68-pin twisted pair ribbon cable design supports data transfers of up to 320 Mb/s and ensures stable signal quality within parallel SCSI architectures. The integrated LVD/SE terminating resistor simplifies correct bus termination and reduces potential signal reflections.
The three IDC 68-pin sockets enable flexible device chaining. The cable is suitable for maintenance work, system expansions and for securing existing infrastructures with Ultra320 SCSI technology.

Interface: Ultra320 SCSI
Design: internal ribbon cable
Number of pins: 68-pin
Connector: 3x IDC 68-pin socket
Termination: integrated LVD/SE terminating resistor
Maximum data transfer rate: 320 Mb/s
Cable length: 0.75 m
Cable type: twisted pair ribbon

The product information provided is for reference purposes only. Technical specifications, photos, descriptions and prices may change without prior notice. The manufacturer and seller are not responsible for possible data discrepancies or typographical errors. We recommend checking the current information before purchasing.
itworkup.co.za | sales@itworkup.co.za | +27 (11)541-9950