




# Supermicro X13SCL-F-B Bulk Intel C262 LGA 1700 micro ATX

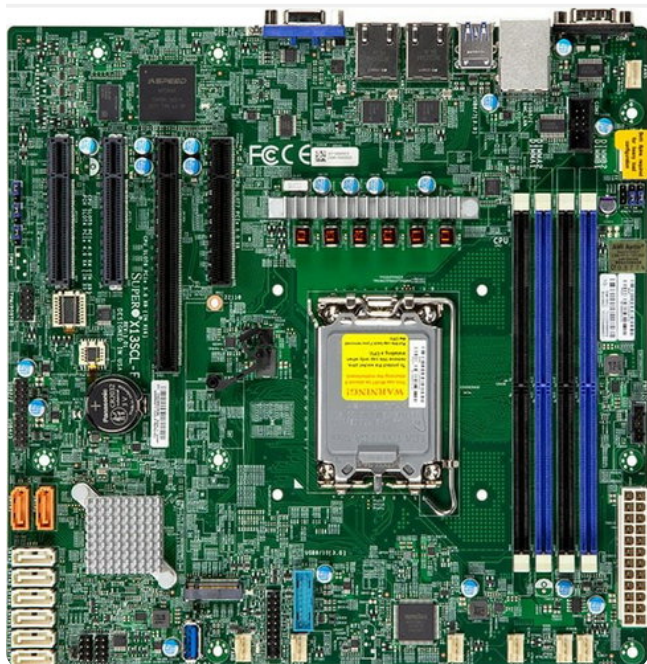

Model: MBD-X13SCL-F-B

Manufacturer: SUPERMICRO

EAN: 672042899166

Product Code: 609461

## R9,671

Number of M.2 (M) slots: 1 | RAID levels: 10 | Maximum internal memory: 128 GB | Ethernet LAN (RJ-45) ports: 2 | COM ports quantity: 1 | RAID levels: 5 | Unbuffered memory: Yes | Memory voltage: 1.1 V | Motherboard chipset: Intel C262 | RAID levels: 1 | Processor socket: LGA 1700 | RAID support: Yes | Wi-Fi: No | Operating temperature (T-T): -5 - 55 °C | RAID levels: 0 | ACPI version: 6.4 | Storage relative humidity (H-H): 8 - 90% | VGA (D-Sub) ports quantity: 1 | Number of memory slots: 4 | Motherboard form factor: micro ATX | USB 3.2 Gen 1 (3.1 Gen 1) Type-A ports quantity: 3 | Compatible processor series: Intel® Xeon® | Supported memory clock speeds: 4000 | Memory slots type: DIMM | Number of SATA III connectors: 8 | Number of COM connectors: 1 | Supported memory clock speeds: 3600 | Supported memory types: DDR5-SDRAM | Component for: Server | USB 3.2 Gen 1 (3.1 Gen 1) connectors: 2 | USB 2.0 ports quantity: 2 | Compatible processor series: Intel Pentium G | Supported storage drive interfaces: SATA III | Processor manufacturer: Intel | Supported memory clock speeds: 4400 MHz | BIOS type: UEFI AMI | System Management BIOS (SMBIOS) version: 3.5 | Operating relative humidity (H-H): 8 - 80% | Ethernet interface type: Gigabit Ethernet | BIOS memory size: 32 Mbit | USB 2.0 connectors: 4 | Supported memory module capacities: 32GB | Motherboard

The product information provided is for reference purposes only. Technical specifications, photos, descriptions and prices may change without prior notice. The manufacturer and seller are not responsible for possible data discrepancies or typographical errors. We recommend checking the current information before purchasing.

itworkup.co.za | sales@itworkup.co.za | +27 (11)541-9950

chipset family: Intel | Supported memory module capacities: 16GB | Storage temperature (T-T): -30 - 60 °C | Ethernet LAN: Yes | ECC compatibility: ECC | TPM connector: Yes | Warnings: Adjust adequate ventilation to avoid overheating and potential damage. | Supported memory module capacities: 8GB | Supported memory clock speed (max): 4400 MHz | PCI Express x8 (Gen 5.x) slots: 2 | PCI Express x4 (Gen 4.x) slots: 2

---

The product information provided is for reference purposes only. Technical specifications, photos, descriptions and prices may change without prior notice. The manufacturer and seller are not responsible for possible data discrepancies or typographical errors. We recommend checking the current information before purchasing.

[itworkup.co.za](https://itworkup.co.za) | [sales@itworkup.co.za](mailto:sales@itworkup.co.za) | +27 (11)541-9950