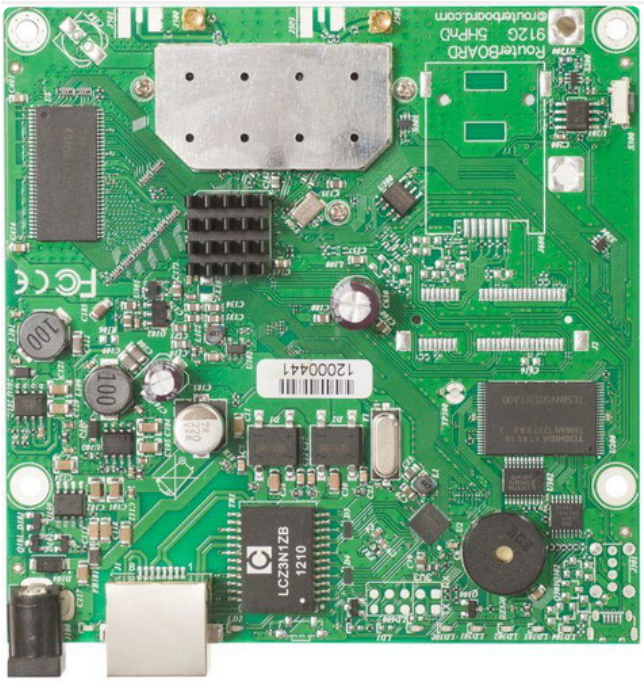


WRL ROUTER BOARD 1000M/RB911G-5HPND MIKROTIK

Model: RB911G-5HPND

Manufacturer: MIKROTIK

EAN: 4752224000552

Product Code: 761864

R1,545 ~~R1,622~~

The RB911G-5HPnD is a small wireless router with an integrated 5Ghz high power wireless card. The Gigabit port helps to utilize the full potential of 802.11n wireless speeds.

It has built in 16kV ESD protection on both the Ethernet and the
MMCX ports.

- RB911G-5HPnD-US (USA) is factory locked for 5170-5250MHz and 5725-5835MHz frequencies. This lock can not be removed.

- RB911G-5HPnD (International) supports 5150MHz-5875MHz range (Specific frequency range can be limited by country regulations).

The product information provided is for reference purposes only. Technical specifications, photos, descriptions and prices may change without prior notice. The manufacturer and seller are not responsible for possible data discrepancies or typographical errors. We recommend checking the current information before purchasing.
itworkup.co.za | sales@itworkup.co.za | +27 (11)541-9950

Summary: Mikrotik RB911G-5HPND. Product type: Motherboard, Device compatibility: Router. Top Wi-Fi standard: Wi-Fi 4 (802.11n), Networking standards: IEEE 802.11a, IEEE 802.11n, IEEE 802.3af, Processor model: AR9342. Basic switching RJ-45 Ethernet ports type: Gigabit Ethernet (10/100/1000). Power connector: DC-in-jack, Power consumption (max): 11 W, DC input voltage: 8 - 30 V. Width: 105 mm, Depth: 105 mm | Vendor Homepage: https://mikrotik.com/product/RB911G-5HPnD#fndtn-downloads | Gaminio tipas: Motininė plokštė | Įrenginio suderinamumas: Maršrutizatorius | Įtampos stebėsena: Taip | Temperatūros stebėsena: Taip | Atstatymo mygtukas: Taip | Licencijos lygis: 3 | „Wi-Fi“ standartas: Wi-Fi 4 (802.11n) | Tinklo standartai: IEEE 802.11a/IEEE 802.11n/IEEE 802.3af | Procesoriaus modelis: AR9342 | Procesoriaus dažnis: 600 | Procesoriaus branduoliai: 1 | Saugyklos talpa: 128 | Laikmena: Sparčioji atmintinė | Vidinė atmintis: 32 | Pagrindinių perjungimo RJ-45 eterneto prievadų skaičius: 1 | Pagrindinių perjungimo RJ-45 eterneto prievadų tipas: Gigabit Ethernet (10/100/1000) | Maitinimo per Eternetą (PoE) prievadų skaičius: 1 | Maitinimo jungtis: DC kištukinis lizdas | Galios suvartojimas (maks.): 11 | DC įėjimo įtampa: 8 - 30 | Maitinimo per Eternetą (PoE) įtampos diapazonas: 8 - 30 | Plotis: 105 | Ilgis: 105 | Bruto svoris: 0.12 | Neto svoris: 0.1 | Vieneto plotis: 11 | Vieneto gylis: 11 | Vieneto aukštis: 3 | Name: WRL ROUTER BOARD 1000M/RB911G-5HPND MIKROTIK | Model: RB911G-5HPnD | Model name: RB911G-5HPND

The product information provided is for reference purposes only. Technical specifications, photos, descriptions and prices may change without prior notice. The manufacturer and seller are not responsible for possible data discrepancies or typographical errors. We recommend checking the current information before purchasing.
itworkup.co.za | sales@itworkup.co.za | +27 (11)541-9950