


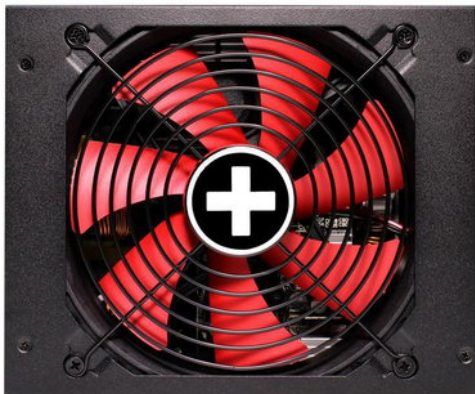

Power Supply
XILENCE 1250
Watts Efficiency
80 PLUS GOLD
PFC Active
XN178

Model: XN178

Manufacturer: XILENCE

EAN: 4044953503511

Product Code: 822241

R4,558

The fully modular power supplies of the X+ series are capable of absorbing high load peaks above the normal rated power in the shortest possible time and comply with Intel's Design Guide 3.0. Thus, the power supplies are ideally

suited for driving the latest and most powerful gaming graphics cards with PCI Express 5 specifications. An 80+ Gold certification confirms a high efficiency and energy efficiency of this power supply series. Six different protection circuits (OCP, OVP, UVP, SCP, OPP, OTP) ensure safe operation even in heated gaming sessions. The fans of the ATX 3.0 power supplies run with Fluid Dynamic Bearing technology and are very quiet. In addition, they convince with an extremely long durability and their excellent cooling performance. All of these specifications make the affordable Performance X+ series ideal for use with the latest gaming PC systems.

The product information provided is for reference purposes only. Technical specifications, photos, descriptions and prices may change without prior notice. The manufacturer and seller are not responsible for possible data discrepancies or typographical errors. We recommend checking the current information before purchasing.

itworkup.co.za | sales@itworkup.co.za | +27 (11)541-9950

Summary: Xilence XP1250MR9.2. Total power: 1250 W, AC input voltage: 100 - 240 V, AC input frequency: 50/60 Hz. Motherboard power connector: 20+4 pin ATX, Motherboard power cable length: 65 cm, Cabling type: Fully-Modular. Purpose: PC, Power supply unit (PSU) form factor: ATX, 80 PLUS certification: 80 PLUS Gold. Product colour: Black, Red, Cooling type: Active, Fan diameter: 14 cm. Compliance certificates: RoHS, WEEE | Vendor Homepage: <https://www.xilence.net/en/power-supplies/235> | Total power: 1250 | AC input voltage: 100 - 240 | AC input frequency: 50/60 | Input current: 15 | Power Factor Correction (PFC) type: Active | Max output current (+3.3V): 20 | Max output current (+12V): 104.1 | Max output current (+5V): 20 | Max output current (-12V): 0.3 | Max output current (+5Vsb): 3 | Efficiency: 89 | Power protection features: Over current/Over power/Over voltage/Short circuit/Under voltage | Motherboard power connector: 20+4 pin ATX | Motherboard power cable length: 650 | Number of SATA power connectors: 12 | PCI Express power connectors (6+2 pin): 3 | PCI Express power connectors (8-pin): 1 | CPU power connector (4+4 pin): Yes | Cabling type: Fully-Modular | 80 PLUS certification: 80 PLUS Gold | Purpose: PC | Power supply unit (PSU) form factor: ATX | ATX version: 3.0 | Bearing technology: FDB | Product colour: Black/Red | Cooling type: Active | Fan diameter: 140 | Number of fans: 1 | Compliance certificates: RoHS/WEEE | Width: 150 | Depth: 180 | Height: 86 | Package type: Box | Sustainability certificates: ErP | Sustainability compliance: Yes | Unit Calculated Weight: 3.33 | Product Net Weight: 1.5 | Unit Calculated Volume: 0.006082 | Units per Shipping Box: 1 | Unit Width: 19 | Shipping Box Height: 9.7 | Unit Depth: 33 | Unit Height: 9.7 | Name: CASE PSU ATX3.0 1250W/XP1250MR9.2 XN178 XILENCE | Model name: XP1250MR9.2

The product information provided is for reference purposes only. Technical specifications, photos, descriptions and prices may change without prior notice. The manufacturer and seller are not responsible for possible data discrepancies or typographical errors. We recommend checking the current information before purchasing.

itworkup.co.za | sales@itworkup.co.za | +27 (11)541-9950