


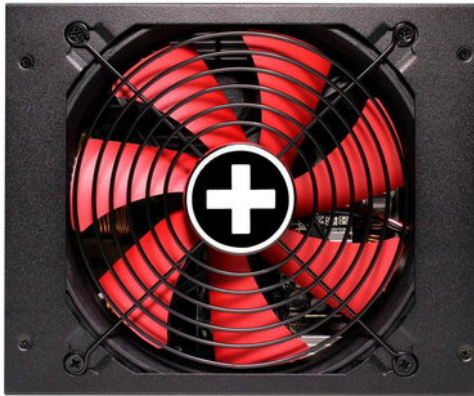

Power Supply XILENCE 1050 Watts Efficiency 80 PLUS GOLD PFC Active XN176

Model: XN176

Manufacturer: XILENCE

EAN: 4044953503498

Product Code: 822242

R4,256

The fully modular power supplies of the X+ series are capable of absorbing high load peaks above the normal rated power in the shortest possible time and comply with Intel's Design Guide 3.0. Thus, the power supplies are ideally suited for driving the latest and most powerful gaming graphics cards with PCI Express 5 specifications. An 80+ Gold certification confirms a high efficiency and energy efficiency of this power supply series. Six different protection circuits (OCP, OVP, UVP, SCP, OPP, OTP) ensure safe operation even in heated gaming sessions. The fans of the ATX 3.0 power supplies run with Fluid Dynamic Bearing technology and are very quiet. In addition, they convince with an extremely long durability and their excellent cooling performance. All of these specifications make the affordable Performance X+ series ideal for use with the latest gaming PC systems.

The product information provided is for reference purposes only. Technical specifications, photos, descriptions and prices may change without prior notice. The manufacturer and seller are not responsible for possible data discrepancies or typographical errors. We recommend checking the current information before purchasing.

itworkup.co.za | sales@itworkup.co.za | +27 (11)541-9950

Summary: Xilence XP1050MR9.2. Total power: 1050 W, AC input voltage: 100 - 240 V, AC input frequency: 50/60 Hz. Motherboard power connector: 20+4 pin ATX, Motherboard power cable length: 65 cm, Cabling type: Fully-Modular. Purpose: PC, Power supply unit (PSU) form factor: ATX, 80 PLUS certification: 80 PLUS Gold. Compliance certificates: RoHS, WEEE. Width: 150 mm, Depth: 180 mm, Height: 86 mm | Vendor Homepage: <https://www.xilence.net/en/power-supplies/234> | AC input frequency: 50/60 | AC input voltage: 100 - 240 | Efficiency: 89 | Input current: 15 | Max output current (+12V): 87.5 | Max output current (+3.3V): 20 | Max output current (+5V): 20 | Max output current (+5Vsb): 3 | Max output current (-12V): 0.3 | Power Factor Correction (PFC) type: Active | Power protection features: Over current/Over power/Over voltage/Short circuit/Under voltage | Total power: 1050 | Cabling type: Fully-Modular | CPU power connector (4+4 pin): Yes | Motherboard power cable length: 650 | Motherboard power connector: 20+4 pin ATX | Number of SATA power connectors: 12 | PCI Express power connectors (6+2 pin): 3 | PCI Express power connectors (8-pin): 1 | 80 PLUS certification: 80 PLUS Gold | ATX version: 3.0 | Bearing technology: FDB | Power supply unit (PSU) form factor: ATX | Purpose: PC | Compliance certificates: RoHS/WEEE | Depth: 180 | Height: 86 | Width: 150 | Package type: Box | Sustainability certificates: ErP | Sustainability compliance: Yes | Product Net Weight: 1.5 | Shipping Box Height: 9.8 | Unit Calculated Volume: 0.00608 | Unit Calculated Weight: 3.34 | Units per Shipping Box: 1 | Model name: XP1050MR9.2

The product information provided is for reference purposes only. Technical specifications, photos, descriptions and prices may change without prior notice. The manufacturer and seller are not responsible for possible data discrepancies or typographical errors. We recommend checking the current information before purchasing.

itworkup.co.za | sales@itworkup.co.za | +27 (11)541-9950