


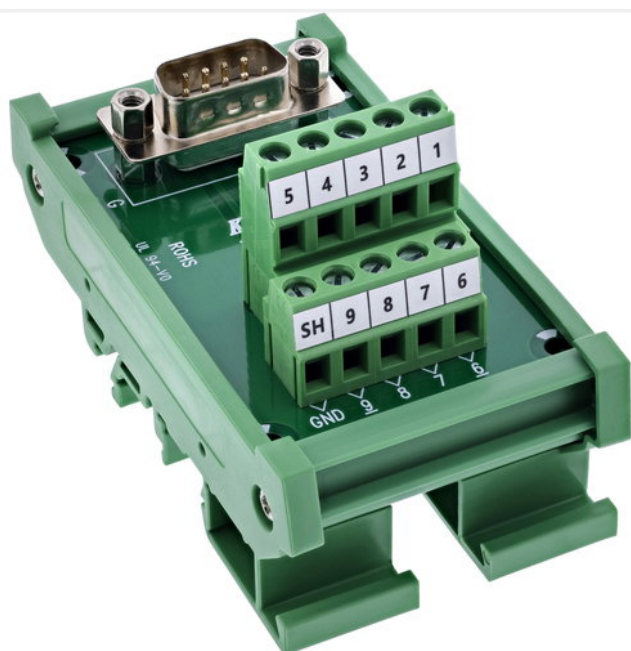

InLine 92501L wire connector Terminal block / D-Sub 9 Green

Model: 92501L

Manufacturer: INLINE

EAN: 4043718345960

Product Code: 870908

R1,062

Time savings during installation: Quick wiring via screw terminals for 14-26 AWG - tool-assisted with flat-head screwdriver ≤ 2.5 mm.

Stable connection thanks to mounting thread: The D-Sub-9 connector is equipped with a mounting thread (UNC #4-40) for connector locking and enables secure screw connection with matching sockets.

Versatile use in industry: Ideal for control cabinet construction, machine control, automation, and service and diagnostic environments.

DIN rail mounting for structured installations: The integrated DIN rail clip allows direct mounting in the control cabinet - space-saving and compliant with standards.

High signal quality: An insulation resistance of ≥ 10 M Ω at 300 V DC and a rated current of 0.8 A per pin ensure reliable signal transmission in professional applications.

The InLine® D-Sub 9 terminal block with connector was specially developed for structured

installations in control cabinets or on DIN DIN rails. The side-accessible screw terminals with

The product information provided is for reference purposes only. Technical specifications, photos, descriptions and prices may change without prior notice. The manufacturer and seller are not responsible for possible data discrepancies or typographical errors. We recommend checking the current information before purchasing.

itworkup.co.za | sales@itworkup.co.za | +27 (11)541-9950

pressure plate mounts enable quick wiring of single wires in the 14–26 AWG range, without any soldering. Assembly is tool-assisted with a flat-head screwdriver ≤ 2.5 mm.

Thanks to the mounting thread (UNC #4-40), the plug can be mechanically secured to matching sockets. The housing design with integrated DIN rail clip allows quick mounting on DIN rails. The EVA insulating layer on the underside provides additional protection when mounting on conductive surfaces.

D-Sub 9 connector: Breakout design, with mounting thread for connector locking (UNC #4-40)

Connection technology: Screw terminal with pressure plate

Connection range: 14–26 AWG

Actuation: With flat-blade screwdriver ≤ 2.5 mm

Rated current: 0.8 A per pin

Max. operating voltage: 100 V between two signals

Insulation resistance: ≥ 10 M Ω @ 300 V DC

Operating temperature: -10 °C to $+70$ °C

Insulation layer: EVA insulation on underside

Mounting: Housing for direct mounting on DIN rail

Dimensions: approx. 87 × 46 × 51 mm (L × W × H)