


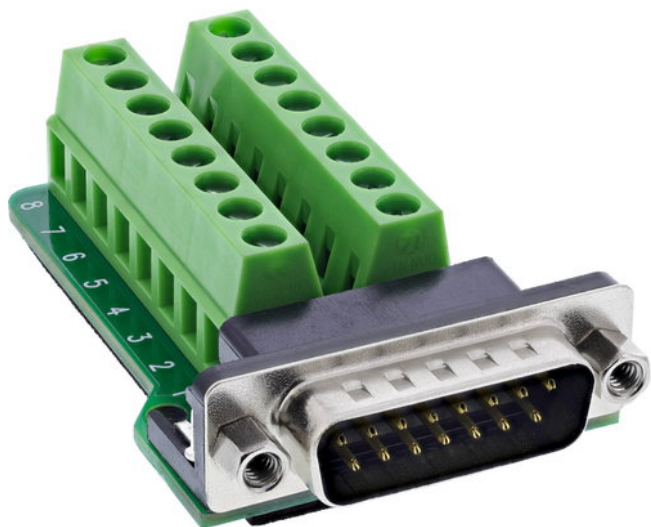

InLine 92502B wire connector Terminal block / D-Sub 15 Black, Green

Model: 92502B

Manufacturer: INLINE

EAN: 4043718345991

Product Code: 870911

R889

Time savings during installation: Quick wiring via screw terminals for 18-26 AWG – tool-assisted with flat-head screwdriver ≤ 2.5 mm.

Stable connection thanks to screw lock: The 2-row D-Sub-15 connector is equipped with a mounting thread (UNC #4-40) and enables secure mechanical fixation with matching sockets.

Versatile use in industry: Ideal for serial control lines in automation, mechanical engineering, test stations, or signal distribution.

Compact design: Measuring approx. $62.5 \times 31 \times 16$ mm, the terminal block can be integrated into existing installations in a space-saving manner – even with high contact density.

High signal quality: An insulation resistance of ≥ 10 M Ω at 300 V DC and a rated current of 0.7 A per pin ensure reliable signal transmission.

The InLine® D-Sub 15 terminal block with connector in a 2-row design is ideal for wiring serial

The product information provided is for reference purposes only. Technical specifications, photos, descriptions and prices may change without prior notice. The manufacturer and seller are not responsible for possible data discrepancies or typographical errors. We recommend checking the current information before purchasing.

itworkup.co.za | sales@itworkup.co.za | +27 (11)541-9950

signals between control components or for temporary connections in the control cabinet. The screw terminals with pressure plate allow the connection of single wires in the range of 18-26 AWG – without any soldering. Tool-assisted operation is carried out with a flat-head screwdriver ≤ 2.5 mm. The integrated screw lock (UNC #4-40) ensures a stable, vibration-proof connection to matching sockets. The compact design makes the module particularly suitable for industrial applications with limited space.

D-Sub 15 plug: 2-row, with mounting thread for plug locking (UNC #4-40)

Connection technology: Screw terminal with pressure plate

Connection range: 18-26 AWG

Actuation: With flat-blade screwdriver ≤ 2.5 mm

Rated current: 0.7 A per pin

Max. operating voltage: 100 V between two signals

Insulation resistance: ≥ 10 M Ω @ 300 V DC

Operating temperature: -20 °C to +105 °C

Insulation layer: EVA insulation on underside

Dimensions: approx. 63 × 39 × 18 mm (L × W × H)