




InLine 92502C wire connector Terminal block / D-Sub 15 Green

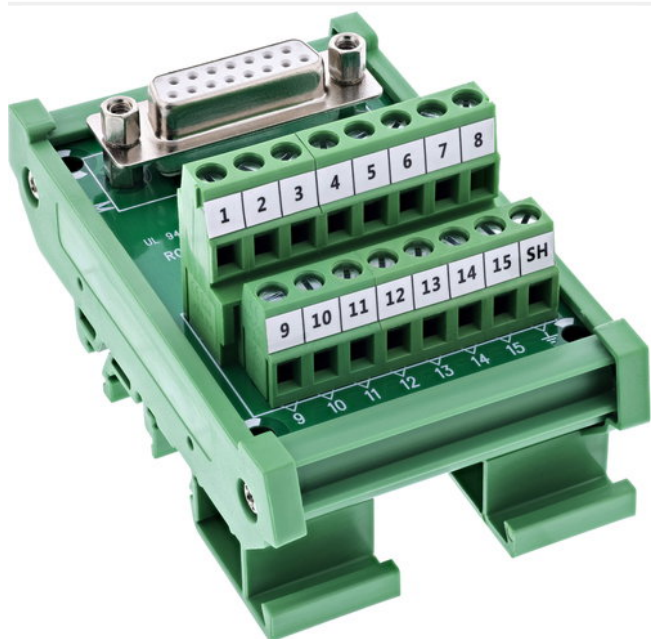

Model: 92502C

Manufacturer: INLINE

EAN: 4043718346004

Product Code: 870912

R1,096

Time savings during installation: Quick wiring via screw terminals for 16–24 AWG – tool-assisted with flat-head screwdriver ≤ 2.5 mm.

Stable connection thanks to screw lock: The 2-row D-Sub-15 female connector is equipped with a mounting thread (UNC #4-40) and enables secure mechanical fixation with matching plugs.

Versatile use in industry: Ideal for serial control lines in control cabinets, test benches, control systems, or building automation.

DIN rail mounting for structured installations: The robust DIN rail housing allows direct mounting on mounting rails – standard-compliant, secure, and space-saving.

High signal quality: An insulation resistance ≥ 10 M Ω at 300 V DC and a rated current of 1.0 A per pin ensure reliable signal transmission – even under continuous load.

The InLine® D-Sub 15 terminal block with female connector in a 2-row design is specially designed for structured installations in control cabinets. The side-accessible screw terminals with pressure plate enable the connection of single wires in the range of 16–24 AWG. Tool-assisted wiring is carried

The product information provided is for reference purposes only. Technical specifications, photos, descriptions and prices may change without prior notice. The manufacturer and seller are not responsible for possible data discrepancies or typographical errors. We recommend checking the current information before purchasing.

itworkup.co.za | sales@itworkup.co.za | +27 (11)541-9950

out with a flat-head screwdriver ≤ 2.5 mm.

The socket has an integrated screw lock (UNC #4-40) for secure connection with matching connectors. The pre-assembled DIN rail clip allows direct mounting on industry-standard top-hat rails. The EVA insulating layer on the underside provides additional protection when mounting on conductive surfaces.

D-Sub 15 socket:2-row, with mounting thread for plug locking (UNC #4-40)

Connection technology:Screw terminal with pressure plate

Connection range:16-24 AWG

Actuation:With flat-blade screwdriver ≤ 2.5 mm

Rated current:1 A per pin

Max. operating voltage:100 V between two signals

Insulation resistance: $\geq 10 \text{ M}\Omega$ @ 300 V DC

Operating temperature:-10 °C to +70 °C

Insulation layer:EVA insulation on underside

Mounting:Housing for direct mounting on DIN rail

Dimensions:approx. 87 × 53 × 51 mm (L × W × H)