


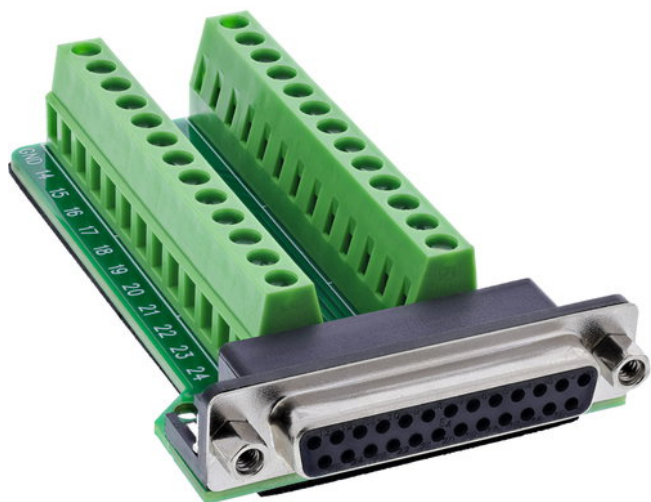

InLine 92502E wire connector Terminal block / D-Sub 25 Green

Model: 92502E

Manufacturer: INLINE

EAN: 4043718346042

Product Code: 870914

R924

Time savings during installation: Quick wiring via screw terminals for 18-26 AWG - tool-assisted with flat-head screwdriver ≤ 2.5 mm.

Stable connection thanks to screw lock: The 2-row D-Sub-25 female connector is equipped with a mounting thread (UNC #4-40) and enables secure mechanical fixation with matching plugs.

Versatile use in industry: Ideal for serial control lines in mechanical engineering, automation, test benches, or signal distribution.

Compact design: Measuring approx. $86.5 \times 53.3 \times 18$ mm, the terminal block can be integrated into existing installations in a space-saving manner, even with a high number of poles.

High signal quality: An insulation resistance of ≥ 10 M Ω at 300 V DC and a rated current of 0.7 A per pin ensure reliable signal transmission - even under continuous load.

The InLine® D-Sub 25 terminal block with female connector in a 2-row design enables structured wiring of up to 25 serial signals via screw terminals with pressure plate. Single wires in the range of

18-26 AWG can be connected quickly and securely - without soldering. Actuation is tool-assisted

The product information provided is for reference purposes only. Technical specifications, photos, descriptions and prices may change without prior notice. The manufacturer and seller are not responsible for possible data discrepancies or typographical errors. We recommend checking the current information before purchasing.

with a flat-blade screwdriver ≤ 2.5 mm.

Thanks to the integrated screw lock (UNC #4-40), the socket can be securely screwed to matching connectors – vibration-proof and durable. The flat and compact design is suitable for industrial applications with high signal density and limited space.

D-Sub 25 socket: 2-row, with mounting thread for plug locking (UNC #4-40)

Connection technology: Screw terminal with pressure plate

Connection range: 18–26 AWG

Actuation: With flat-blade screwdriver ≤ 2.5 mm

Rated current: 0.7 A per pin

Max. operating voltage: 100 V between two signals

Insulation resistance: ≥ 10 M Ω @ 300 V DC

Operating temperature: -20 °C to $+105$ °C

Insulation layer: EVA insulation on underside

Dimensions: approx. $87 \times 53 \times 18$ mm (L $\times$ W $\times$ H)