




InLine 92502F wire connector Terminal block / D-Sub 25 Green

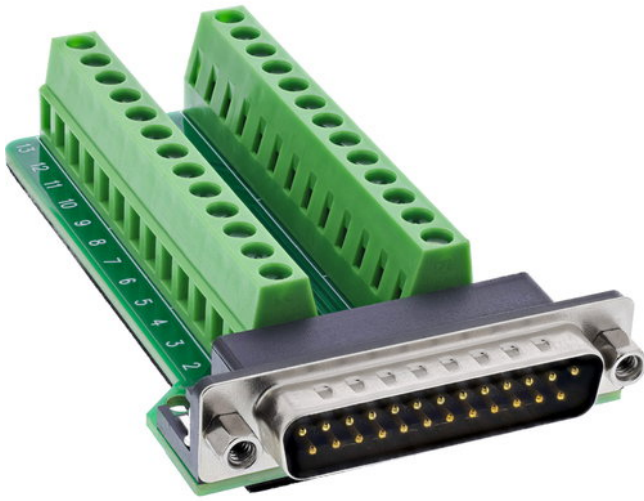

Model: 92502F

Manufacturer: INLINE

EAN: 4043718346059

Product Code: 870915

R924

Time savings during installation: Quick wiring via screw terminals for 18-26 AWG - tool-assisted with flat-head screwdriver ≤ 2.5 mm.

Stable connection thanks to screw lock: The 2-row D-Sub-25 plug is equipped with a mounting thread (UNC #4-40) and enables secure mechanical fastening with matching sockets.

Versatile use in industry: Ideal for serial control lines in mechanical engineering, automation, test benches, or signal distribution.

Compact design: Measuring approx. $86.5 \times 53.3 \times 18$ mm, the terminal block can be integrated into existing installations in a space-saving manner, even with a high number of pins.

High signal quality: An insulation resistance of ≥ 10 M Ω at 300 V DC and a rated current of 0.7 A per pin ensure reliable signal transmission - even under continuous load.

The InLine® D-Sub 25 terminal block with connector in a 2-row design is the ideal solution for serial point-to-point connections with up to 25 wires. The screw terminals with pressure plate enable quick and secure connection of single wires in the 18-26 AWG range - without any soldering. Tool-assisted

The product information provided is for reference purposes only. Technical specifications, photos, descriptions and prices may change without prior notice. The manufacturer and seller are not responsible for possible data discrepancies or typographical errors. We recommend checking the current information before purchasing.

itworkup.co.za | sales@itworkup.co.za | +27 (11)541-9950

wiring is carried out with a flat-head screwdriver ≤ 2.5 mm.

The integrated screw lock (UNC #4-40) ensures a stable connection to the matching socket – vibration-proof and repeatably detachable. Thanks to its compact design, the terminal block is particularly suitable for industrial applications with high signal density and limited space.

D-Sub 25 connector: 2-row, with mounting thread for connector locking (UNC #4-40)

Connection technology: Screw terminal with pressure plate

Connection range: 18–26 AWG

Actuation: With flat-blade screwdriver ≤ 2.5 mm

Rated current: 0.7 A per pin

Max. operating voltage: 100 V between two signals

Insulation resistance: ≥ 10 M Ω @ 300 V DC

Operating temperature: -20 °C to $+105$ °C

Insulation layer: EVA insulation on underside

Dimensions: approx. $87 \times 53 \times 18$ mm (L $\times$ W $\times$ H)