




InLine 92502H wire connector Terminal block / D-Sub 25 Green

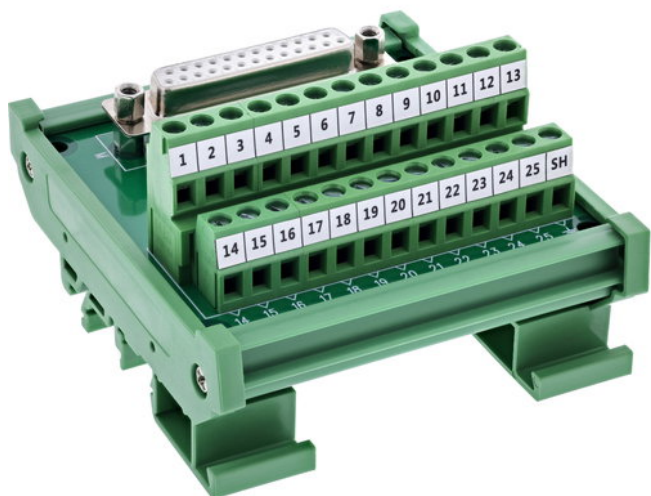

Model: 92502H

Manufacturer: INLINE

EAN: 4043718346073

Product Code: 870916

R1,151

Time savings during installation: Quick wiring via screw terminals for 18–26 AWG – tool-assisted with flat-head screwdriver ≤ 2.5 mm.

Stable connection thanks to screw lock: The 2-row D-Sub-25 female connector is equipped with a mounting thread (UNC #4-40) and enables secure mechanical fastening with matching plugs.

Versatile use in industry: Ideal for structured wiring in control cabinets, control and automation systems, or signal distribution.

DIN rail mounting for standard-compliant installation: The integrated DIN rail housing enables direct mounting on mounting rails – quickly, securely, and in a space-saving manner.

High signal quality: An insulation resistance of ≥ 10 M Ω at 300 V DC and a rated current of 0.7 A per pin ensure reliable signal transmission – even under continuous load.

The InLine® D-Sub 25 terminal block with female connector in a 2-row design was specially developed for structured installations on DIN rails. The screw terminals with pressure plate enable tool-assisted connection of single wires in the 18–26 AWG range – quickly and securely with a flat-

The product information provided is for reference purposes only. Technical specifications, photos, descriptions and prices may change without prior notice. The manufacturer and seller are not responsible for possible data discrepancies or typographical errors. We recommend checking the current information before purchasing.

itworkup.co.za | sales@itworkup.co.za | +27 (11)541-9950

head screwdriver ≤ 2.5 mm.

The socket has an integrated screw lock (UNC #4-40) for secure connection with matching D-Sub plugs. The pre-assembled DIN rail housing facilitates installation in control cabinets and on mounting rails. The compact design and robust construction make the connection block the ideal choice for industrial applications with high signal density.

D-Sub 25 female connector:2-row, with mounting thread for plug locking (UNC #4-40)

Connection technology:Screw terminal with pressure plate

Connection range:18-26 AWG

Actuation:With flat-blade screwdriver ≤ 2.5 mm

Rated current:0.7 A per pin

Max. operating voltage:100 V between two signals

Insulation resistance: ≥ 10 M Ω @ 300 V DC

Operating temperature:-20 °C to +105 °C

Insulation layer:EVA insulation on underside

Mounting:Housing for direct mounting on DIN rail

Dimensions:approx. 87 × 79 × 51 mm (H × W × D)

The product information provided is for reference purposes only. Technical specifications, photos, descriptions and prices may change without prior notice. The manufacturer and seller are not responsible for possible data discrepancies or typographical errors. We recommend checking the current information before purchasing.

itworkup.co.za | sales@itworkup.co.za | +27 (11)541-9950