


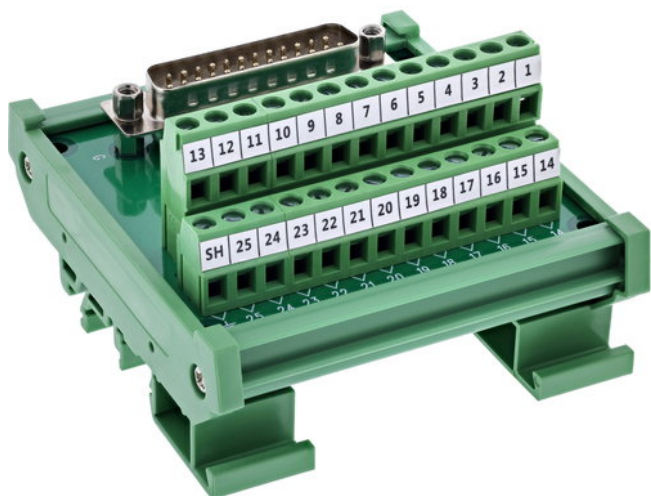

InLine 92502I wire connector Terminal block / D-Sub 25 Green

Model: 92502I

Manufacturer: INLINE

EAN: 4043718346080

Product Code: 870917

R1,151

Time savings during installation: Quick wiring via screw terminals for 18–26 AWG – tool-assisted with flat-head screwdriver ≤ 2.5 mm.

Stable connection thanks to screw lock: The 2-row D-Sub-25 connector is equipped with a mounting thread (UNC #4-40) and enables secure mechanical fixation with matching sockets.

Standard-compliant DIN rail mounting: The robust DIN rail housing allows direct mounting on mounting rails – saving time, ensuring safety, and saving space in the control cabinet.

Clear terminal strip thanks to numbering: Each of the 25 terminal connections is clearly numbered – ideal for structured wiring, troubleshooting, or temporary test setups.

High signal quality: An insulation resistance of ≥ 10 M Ω at 300 V DC and a rated current of 0.7 A per pin ensure reliable signal transmission – even under continuous load.

The InLine® D-Sub 25 terminal block with connector in a 2-row design is specially designed for structured installations on DIN rails. The screw terminals with pressure plate enable quick and secure connection of single wires in the 18–26 AWG range – tool-assisted with a flat-head screwdriver ≤ 2.5

The product information provided is for reference purposes only. Technical specifications, photos, descriptions and prices may change without prior notice. The manufacturer and seller are not responsible for possible data discrepancies or typographical errors. We recommend checking the current information before purchasing.

itworkup.co.za | sales@itworkup.co.za | +27 (11)541-9950

mm.

The integrated screw lock (UNC #4-40) ensures a vibration-proof connection to matching sockets. The compact housing with integrated DIN rail clip is ideal for control, test, and distribution applications. The numbered terminal positions greatly facilitate service, documentation, and rewiring.

D-Sub 25 connector:2-row, with mounting thread for connector locking (UNC #4-40)

Connection technology:Screw terminal with pressure plate, numbered

Connection range:18-26 AWG

Actuation:With flat-blade screwdriver ≤ 2.5 mm

Rated current: 0.7 A per pin

Max. operating voltage: 100 V between two signals

Insulation resistance: ≥ 10 M Ω @ 300 V DC

Operating temperature:-20 °C to +105 °C

Insulation layer:EVA insulation on underside

Mounting:Housing for direct mounting on DIN rail

Dimensions:approx. 87 × 79 × 51 mm (H × W × D)