


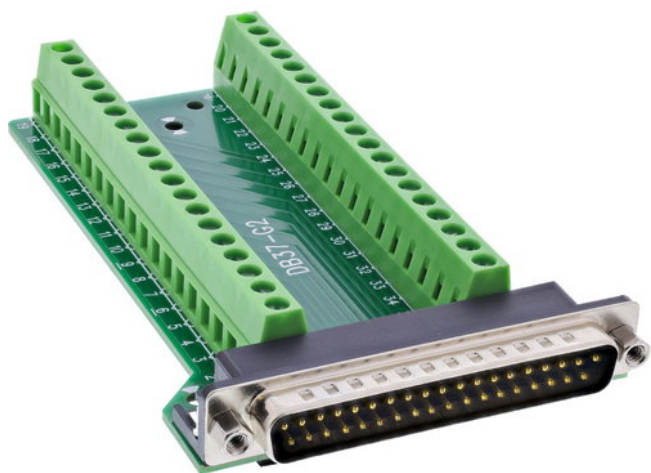

InLine 92502J wire connector Terminal block / D-Sub 37 Black, Green

Model: 92502J

Manufacturer: INLINE

EAN: 4043718346097

Product Code: 870918

R1,096

Time savings during installation: Quick wiring via 37 side-mounted screw terminals for 18-26 AWG - tool-assisted with flat-blade screwdriver ≤ 2.5 mm.

Stable connection thanks to screw lock: The D-Sub 37 connector is equipped with a mounting thread (UNC #4-40) and enables secure mechanical fastening with matching sockets - vibration-proof and durable.

Versatile use in industry: Ideal for signal distribution, test stations, control units, or temporary measurement systems with high connection density.

Side-mounted terminal strip: The connections are positioned next to each other - ideal for limited depth and many signal wires on one level.

High signal quality: An insulation resistance ≥ 10 M Ω at 300 V DC and a rated current of 0.8 A per pin ensure reliable signal transmission - even under continuous load.

The product information provided is for reference purposes only. Technical specifications, photos, descriptions and prices may change without prior notice. The manufacturer and seller are not responsible for possible data discrepancies or typographical errors. We recommend checking the current information before purchasing.

itworkup.co.za | sales@itworkup.co.za | +27 (11)541-9950

The InLine® D-Sub 37 terminal block with connector is designed for professional signal wiring in laboratory, service, or machine environments. The side-mounted screw terminals with pressure plate enable quick connection of single wires in the 18–26 AWG range without soldering. Operation is performed with a flat-blade screwdriver ≤ 2.5 mm.

The robust screw lock (UNC #4-40) ensures a secure connection to the opposite end. The wide 2-row layout is ideal for applications with many individual signals in a confined space – e.g., signal distributors, adapters, or measuring devices in control cabinets or test areas.

D-Sub 37 connector: 2-row, with mounting thread for connector locking (UNC #4-40)

Connection technology: Screw terminal with pressure plate (side-mounted)

Connection range: 18–26 AWG

Actuation: With flat-blade screwdriver ≤ 2.5 mm

Rated current: 0.8 A per pin

Max. operating voltage: 70 V between two signals

Insulation resistance: ≥ 10 M Ω @ 300 V DC

Operating temperature: –20 °C to +70 °C

Insulation layer: EVA insulation on underside

Dimensions: approx. 115 × 70 × 18 mm (L × H × D)