


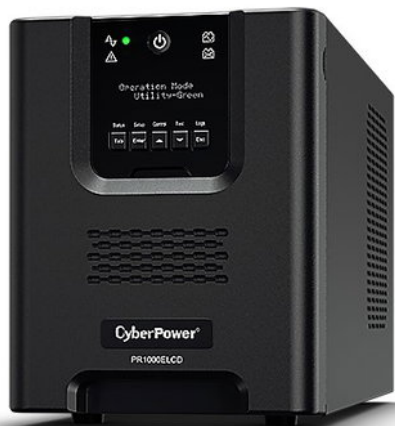

CyberPower PR1000ELCD uninterruptible power supply (UPS) Line- Interactive 1 kVA 900 W 8 AC outlet(s)

Model: PR1000ELCD

Manufacturer: CYBERPOWER

EAN: 4712364143809

Product Code: 937907

R9,761

Certification: CE, EAC, RCM, RoHS | Compatible operating systems: Windows 7 / Vista / XP / 2000, Server 2003 / 2008, Linux | UPS topology: Line-Interactive | AC outlet types: C13 coupler | Waveform: Pure sine | Surge energy rating: 405 J | Output frequency: 50/60 Hz | Hot-swap battery: Yes | Number of output IEC jumpers: 1 | Harmonized System (HS) code: 8504408590 | Automatic Voltage Regulation (AVR): Yes | Overload protection: Yes | AC outlets quantity: 8 AC outlet(s) | Response time: 4 ms | Serial ports quantity: 1 | Product colour: Black | Surge protection: Yes | Weight: 18.9 kg | Typical backup time at half load: 16 min | Operating temperature (T-T): 0 - 40 °C | Input frequency: 50/60 Hz | Typical backup time at full load: 4 min | Power protection features: Overload | Package

The product information provided is for reference purposes only. Technical specifications, photos, descriptions and prices may change without prior notice. The manufacturer and seller are not responsible for possible data discrepancies or typographical errors. We recommend checking the current information before purchasing.

itworkup.co.za | sales@itworkup.co.za | +27 (11)541-9950

height: 360 mm | Number of batteries supported: 1 | Form factor: Tower | Package width: 316 mm | Power factor: 0.9 | Output operation voltage (min): 230 V | Cables included: USB cable | Output operation voltage (max): 230 V | Depth: 432 mm | Non-operating altitude: 0 - 15000 m | Height: 221 mm | Output power capacity: 1 kVA | Battery recharge time: 8 h | Display type: LCD | Operating relative humidity (H-H): 0 - 95% | Width: 170 mm | Storage relative humidity (H-H): 0 - 95% | EMI/RFI noise filtering: Yes | Housing material: Metal | Input operation voltage (max): 301 V | Operating altitude: 0 - 3000 m | USB 2.0 ports quantity: 1 | Battery technology: Sealed Lead Acid (VRLA) | LED indicators: Operation | LED indicators: Error | Power plug: C14 coupler | Storage temperature (T-T): - 15 - 45 °C | Input operation voltage (min): 151 V | Output power: 900 W | Warnings: Use the appliance in well-ventilated areas to avoid overheating. | Warnings: Keep away from sources of fire and water. | Warnings: Do not disassemble the unit housing, there may be a risk of electric shock.

The product information provided is for reference purposes only. Technical specifications, photos, descriptions and prices may change without prior notice. The manufacturer and seller are not responsible for possible data discrepancies or typographical errors. We recommend checking the current information before purchasing.

itworkup.co.za | sales@itworkup.co.za | +27 (11)541-9950