




PC Power Supply DEEPCOOL PS750P-FE, Black

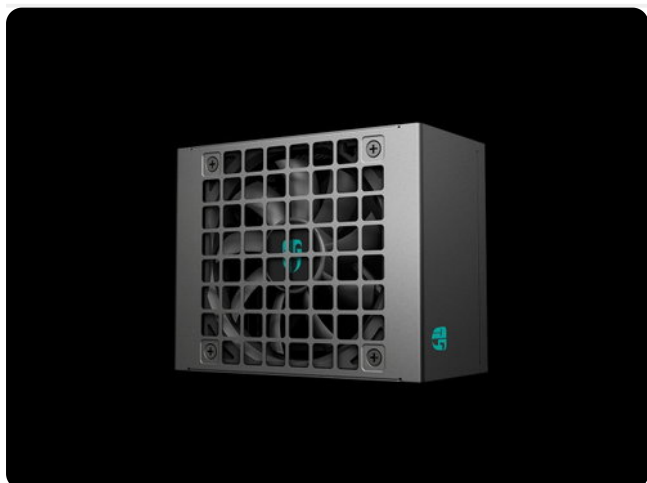

Model: R-PS750P-FE0B-JGEU

Manufacturer: DEEPCOOL

EAN: 6933412724513

Product Code: 940681

R3,357

Certification: CE/FCC/CCC/RCM/EAC/CAN ICES-003(B)/NMB-003(B) /TUV-RH | Efficiency: 92.41% | Product colour: Black | 80 PLUS certification: 80 PLUS Bronze | Power protection features: OVP (overvoltage protection) | AC input frequency: 50/60 Hz | Fan diameter: 9.2 cm | Power protection features: UVP (undervoltage protection) | Operating temperature (T-T): 0 - 50 °C | Depth: 100 mm | Number of fans: 1 fan(s) | Input current: 10 - 5 A | AC input voltage: 100 - 240 V | Power protection features: NLO | Power protection features: SCP (short circuit protection) | Width: 125 mm | Package type: Box | Power protection features: OCP (overcurrent protection) | Purpose: PC | Power protection features: OPP (overload protection) | Power protection features: SIP (surge and shock protection) | On/off switch: Yes | Total power: 750 W | Peripheral (Molex) power connectors (4-pin): 2 | Cooling type: Active | Height: 63.5 mm | Power protection features: OTP (overheat protection) | Motherboard power connector: 20+4 pin ATX | Number of SATA power connectors: 6 | PCI Express power connectors (16-pin): 1 | Max output current (+12V): 62.5 A | ATX power connector (20+4 pin): Yes |

The product information provided is for reference purposes only. Technical specifications, photos, descriptions and prices may change without prior notice. The manufacturer and seller are not responsible for possible data discrepancies or typographical errors. We recommend checking the current information before purchasing.

itworkup.co.za | sales@itworkup.co.za | +27 (11)541-9950

Power Good signal delay range: 100 - 150 ms | Power Factor Correction (PFC) type: Active |
Motherboard power cable length: 30 cm | PCI Express power connectors (6+2 pin): 3 | CPU power
connector (4+4 pin): Yes | Fan location: Top | Cabling type: Modular | Power supply unit (PSU) form
factor: SFX | Compliance certificates: RoHS | Compliance certificates: CE | Mean time between
failures (MTBF): 100000 h | Compliance certificates: Federal Communications Commission (FCC) |
Bearing technology: Fluid Dynamic Bearing (FDB) | ATX version: 3.1 | Combined power (+12V): 750
W | Sustainability compliance: Yes

The product information provided is for reference purposes only. Technical specifications, photos, descriptions and prices
may change without prior notice. The manufacturer and seller are not responsible for possible data discrepancies or
typographical errors. We recommend checking the current information before purchasing.

itworkup.co.za | sales@itworkup.co.za | +27 (11)541-9950