




PC Power Supply DEEPCOOL PS850P-FE, Black

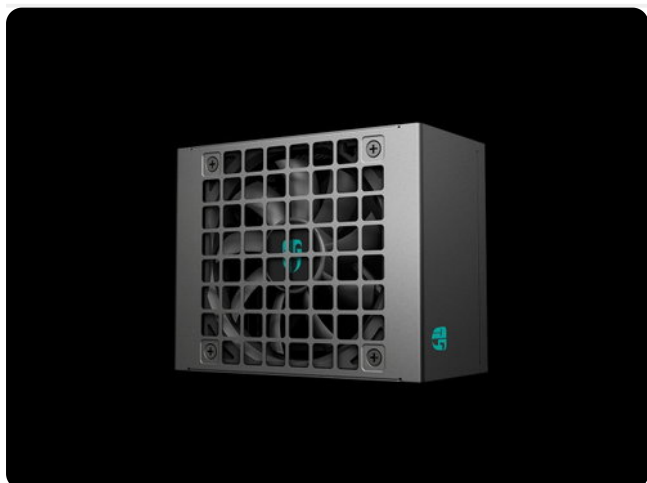

Model: R-PS850P-FE0B-JGEU

Manufacturer: DEEPCOOL

EAN: 6933412724650

Product Code: 940682

R3,659

Certification: CE/FCC/CCC/RCM/EAC/CAN ICES-003(B)/NMB-003(B) /TUV-RH | PCI Express power connectors (16-pin): 1 | Cooling type: Active | Input current: 13 - 6.5 A | AC input voltage: 100 - 240 V | Product colour: Black | AC input frequency: 50/60 Hz | Package type: Box | Operating temperature (T-T): 0 - -40 °C | Sustainability compliance: Yes | Compliance certificates: RoHS | Compliance certificates: CE | Compliance certificates: Federal Communications Commission (FCC) | Motherboard power connector: 20+4 pin ATX | Fan diameter: 9.2 cm | ATX version: 3.1 | Depth: 100 mm | Efficiency: 92% | On/off switch: Yes | Power supply unit (PSU) form factor: SFX | Purpose: PC | Peripheral (Molex) power connectors (4-pin): 2 | PCI Express power connectors (6+2 pin): 3 | Number of fans: 1 fan(s) | Power protection features: OPP (overload protection) | Power protection features: SIP (surge and shock protection) | Power protection features: SCP (short circuit protection) | Combined power (+12V): 850 W | Power protection features: UVP (undervoltage protection) | Power protection features: NLO | Power protection features: OVP (overvoltage protection) | Power

The product information provided is for reference purposes only. Technical specifications, photos, descriptions and prices may change without prior notice. The manufacturer and seller are not responsible for possible data discrepancies or typographical errors. We recommend checking the current information before purchasing.

itworkup.co.za | sales@itworkup.co.za | +27 (11)541-9950

protection features: OTP (overheat protection) | Power protection features: OCP (overcurrent protection) | Power Good signal delay range: 100 - 150 ms | Motherboard power cable length: 35 cm | Max output current (+12V): 70.8 A | 80 PLUS certification: 80 PLUS Gold | Height: 63.5 mm | Power Factor Correction (PFC) type: Active | Mean time between failures (MTBF): 100000 h | Fan location: Top | Total power: 850 W | Bearing technology: Fluid Dynamic Bearing (FDB) | Width: 125 mm | Number of SATA power connectors: 6 | Cabling type: Modular | ATX power connector (20+4 pin): Yes | CPU power connector (4+4 pin): Yes

The product information provided is for reference purposes only. Technical specifications, photos, descriptions and prices may change without prior notice. The manufacturer and seller are not responsible for possible data discrepancies or typographical errors. We recommend checking the current information before purchasing.

itworkup.co.za | sales@itworkup.co.za | +27 (11)541-9950